




LTE 6 Way IR Pass Amplifier

Art. Number 334023

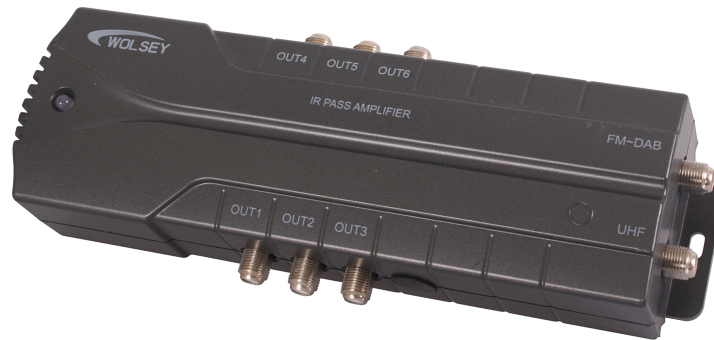

- Distributes to multiple TV's around the home
- Allows control of Sky Digital receivers when used with TRIAX Digital Links
- 2 Input 6 Output
- Short circuit protected on each output
- Power on LED
- Screened housing
- F-Connectors
- Easy to mount fixing
- Mains powered
- 9VDC/15mA on outputs

Technical Specifications

ORDER INFORMATION

EAN Number 5702663340237

FREQUENCY RANGE

Output frequency range MHz	85...790 MHz
Frequency range UHF MHz	470-790 MHz
Frequency Range FM MHz	87.5...108 MHz
Frequency Range DAB MHz	217...230 MHz
Frequency range VHF MHz	85...230 MHz

GAIN

Gain dB	10 +/-2 dB
Noise figure dB	<5 dB

ELECTRICAL

Impedance Ω	75 Ω
----------------------	-------------

OPERATIONAL

AC Supply voltage VAC	230 \pm 10% / 50Hz VAC
-------------------------	--------------------------

CONNECTORS



Technical Specifications

Number of inputs	2
Number of outputs	6

MECHANICAL

Colour	RAL 7016 - Anthracite grey
Packing QTY	1
Packaging Height m	0.000 m
Packaging Width m	0.000 m
Packaging Depth m	0.000 m
Packaging Volume m3	0.000 m3
Net Weight kg	0.550 kg
Tara Weight kg	0.100 kg
Total Weight kg	0.650 kg
Remarks	Fully screened within plastic housing >25dB rejection at 821MHz Short circuit protection on outputs