
# **Electronic Locking** Magnet Range






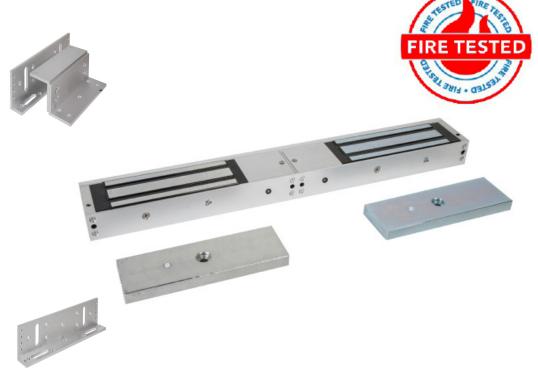

### Double Standard Magnetic Lock (1200lb)

#### Technical specifications

- Aluminium housing.
- 12/24vdc @600/300mA.
- 2 x 545kgs (1200lb) holding force.
- Built in surge protection.
- ML1200-D-M = Monitored



ML1200-D-M	530x73x40 (mm)	Double Magnetic Lock 1200lb / 545kg x 2	8.54Kg (Boxed) / 5.58Kg (Unboxed)
Armature	185x60x15 (mm)	Metal armature plate	1.26Kg (Unboxed)
BK1200ZL	Z = 266L (mm)	ZL Bracket	1.26Kg (Boxed) / 1.12Kg (Unboxed)
BK1200L	L = 185L (mm)	L Bracket	524g (Boxed) / 426g (Unboxed)

#### Other items in the RGL range.



## FIRE TESTED

The ML600 range of magnets and brackets have been fire tested to BSEN1634-1-2014

(30 & 60 minute timber door-sets)

#### FEATURES

Standard double magnet.

· Clean and compact design in aluminium.

• Multi LED indication on ML1200-D-M

Suitable brackets:

- BK1200ZL (ZL Brackets)
- BK1200L (L Brackets)
- AH1200 (Armature Housing)

