


UNIX 52, LTE 700, Ch 21-48 (Color box)

Art. Number 105560

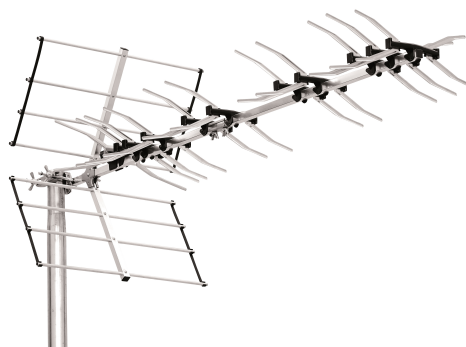

TRIAX UHF LTE 700 Aerials

Disruption free installation from rooftop to outlet.

- Interference protection from LTE 700 & 800 signals
- Quick and easy installation with semi-assembled aerials
- Mechanical filtering for higher gain
- Reliable high-quality aerials secures end-consumer satisfaction
- Corrosion and weather proof dipole housing
- Designed to receive DTT signals in the 470...694 MHz range
- Access to reliable, expert support from TRIAX

Technical Specifications

ORDER INFORMATION

EAN Number 5702661055607

FREQUENCY RANGE

Band UHF
 Channels 21...48
 Frequency range UHF | MHz 470...694 MHz
 LTE protection @ 700Mhz

GAIN

Gain | dBi 14.5 max dBi
 Gain @ 474 MHz (Ch. 21) | dBi 12.3 dBi

LOSS

Rejection @ 788 MHz (Ch. 60) | dB 8.1 dB

ELECTRICAL

Front to back ratio - horizontal | dB 20 dB

MECHANICAL



Technical Specifications

Elements	52
Windload @42 m/s N	96 N
Beamwidth horizontal °	±25 °
Bracketry	Mast bracket - rear
Main material	Aluminium
Packing QTY	1
Product Height mm	80 mm
Product Length mm	1394 mm
Product Width mm	450 mm
Product Depth mm	890 mm
Packaging Height m	0.085 m
Packaging Width m	0.945 m
Packaging Depth m	0.455 m
Packaging Volume m3	0.036 m3
Net Weight kg	1.340 kg
Tara Weight kg	0.845 kg
Total Weight kg	2.185 kg